

## **derView CATxIP CATx IP CATxIP 4000 4024 von Adder (AVX4024IP-EURO): 24 Port 4 User Matrix CATx KVM over IP Switch**



### **DESCRIPTION:**

The AdderView CATxIP 4024 Series is a range of secure, KVM via CATx switches that provides 4 concurrent local, remote or global users with BIOS-level control of up to 24 multiplatform servers.

A "plug-and-play," 1U appliance, the AdderView CATxIP is a completely self-contained system that installs in minutes combining high security, flexibility, integrated remote power control, faultless quality video and optional CD quality audio.

The two members of the series are the AdderView CATx supporting 16 or 24 CATx computer connections, 4 simultaneous users (1x local PS/2 or USB, 4 x remote over CATx) and the AdderView CATx IP supporting 16 or 24 CATx computer connections, 4 simultaneous users (1x local PS/2 or USB, 2 x remote over CATx, 1 x global over IP)

### **FEATURES:**

- \* Exceptionally high video performance to local, remote and global users
- \* True multi-platform support
- \* Flash upgradeable CAMs available for PS/2, USB and Legacy Sun keyboard and mouse support with optional audio
- \* Country code reporting
- \* DDC and keyboard and mouse emulation
- \* PS/2 or USB keyboard and mouse control
- \* Expand using CATx cascade connections with simple user intuitive set up
- \* Optional CD quality audio when using correct Computer Interface Module (CAM)
- \* Power control functions supported via dedicated serial port
- \* Enterprise grade security (using AES 128 bit encryption and RSA 2048 bit public key authentication)
- \* Global users (IP) can chose between HTTP or RealVNC for highly secure connections and high performance.

### **SPECIFICATION:**

Physical design

AdderView CATx: 1U high metal case 482mm/19" (w), 215mm/8.5" (d), 45mm/1.8" (h)  
AdderView CATxIP: 1U high metal case 482mm/19" (w), 280mm/8.5" (d), 45mm/1.8" (h)  
rack mount kits inc

Local KVM console connection

Video: HDD15. Keyboard/Mouse: MiniDin6 / USB type A. Audio: 3.5mm stereo jack

Computer and remote CATx user connections  
All RJ45 style

Network port (AdderView IP models only)  
RJ45 10/100Mb auto-sensing Ethernet port

Power connections  
IEC style power lead (100 – 240V AC, 50-60Hz). Redundant via 2.5mm DC jack (5V DC, 4A).

Other connectors  
DB9 female for flash upgrade, syncing boxes and other special functions.  
DB9 male for RS232 triggered power switches.  
DB9 Male (AdderView IP only) for modem connection.

Hardware compatibility  
Supports PC, Sun (USB & 8-pin styles), Mac (USB), RS/6000, Alpha and SGI computers using PS/2, USB or Sun computer interface modules.

Software compatibility  
Operates with all known software and operating systems including Windows (all); DOS; Linux, Unix, BSD; all Sun OS; all Mac OS; NetWare.

Operating Temperature  
0°C to 40°C / 32°F to 104°F

Approvals  
CE, FCC


**Artikelnummern:**

AVX4016IP-EURO AdderView CATxIP CATx IP 4x16 KVMA over IP Switch

CATX-USB (USB computer access module)  
CATX-USBA (USB computer access module with audio)  
CATX-PS2 (PS2 computer access module)  
CATX-PS2A (PS2 computer access module with audio)  
CATX-SUNA (Computer access module with audio for Sun)

X100/R Benutzer Station über CATx bis 100 Meter für VGA Video und PS/2 Tastatur/Maus  
X100A/R Benutzer Station über CATx bis 100 Meter für VGA Video, PS/2 Tastatur/Maus und Audio  
X100AS/R Benutzer Station über CATx bis 100 Meter für VGA Video, PS/2 Tastatur/Maus, Audio und Skew Compensation

X200/R Benutzer Station über CATx bis 300 Meter für VGA Video und USB Tastatur/Maus  
X200A/R Benutzer Station über CATx bis 300 Meter für VGA Video, USB Tastatur/Maus und Audio  
X200AS/R Benutzer Station über CATx bis 300 Meter für VGA Video, USB Tastatur/Maus, Audio und Skew Compensation

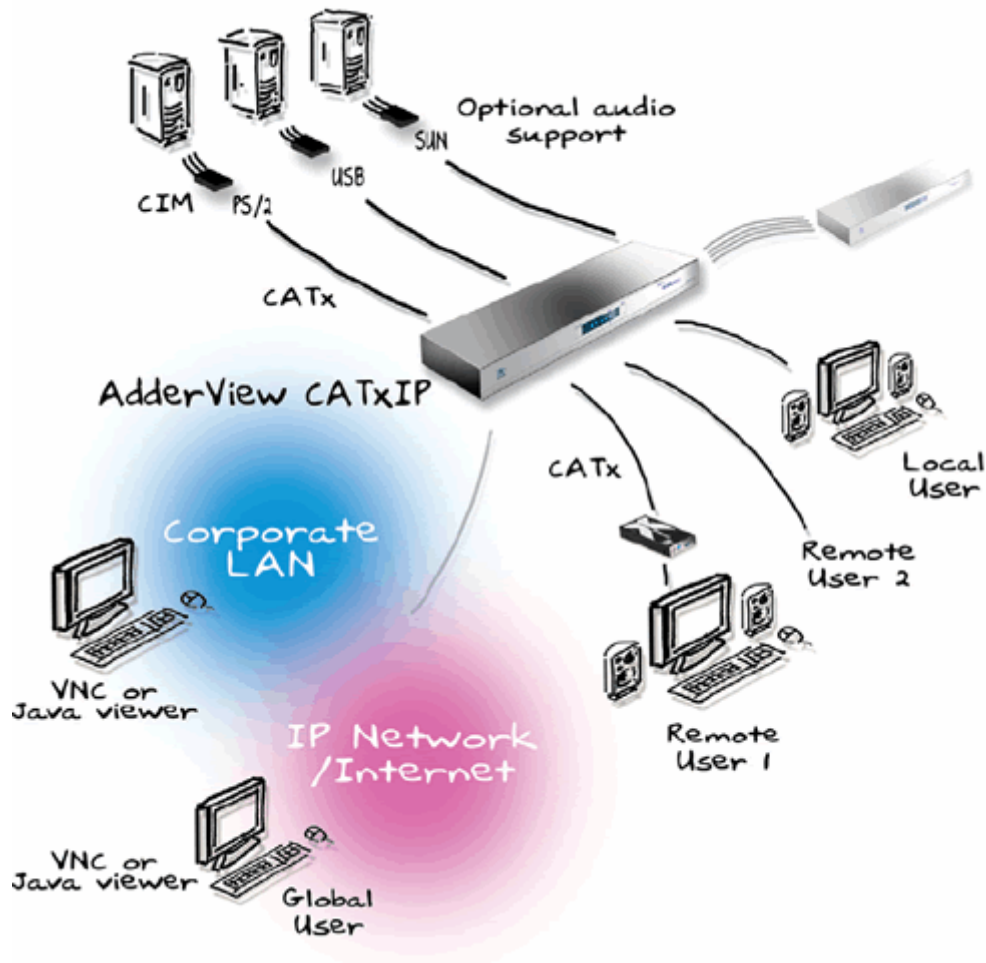

## Kontakt Daten - Anfrage:

Tel: 02822 33 33 990

E-Mail: [info@bellequip.at](mailto:info@bellequip.at)

Internet: [www.bellequip.at](http://www.bellequip.at)

# Lösungen für

IT, EDV, Rechenzentren, Industrie, Automation, Telekommunikation, Leitstand, Rundfunk, Fernsehen, Werbung		Physikalischer Schutz – Datenschutz IT-Sicherheitsräume
19 Zoll Einbaukonsolen 2 Port KVM Switches 4 Port KVM Switches 8 Port KVM Switches 16 Port KVM Switches KVM over IP Switches Matrix KVM over IP Switches KVM Switches DVI KVM Switches DVI Matrix Switches KVM Extender KVM over IP Extender USB Extender VGA Extender VGA + Audio Extender VGA + Audio + RS232 Extender DVI Extender DVI KVM Extender HDMI Extender DVI Splitter VGA Splitter VGA Video Switches Digital Signage Audio over IP Desktop over IP Line Interaktive USV Anlagen	1p / 1p Online USV Anlagen 3p / 1p Online USV Anlagen 3p / 3p Online USV Anlagen USV Anlagen USV Batterien USV Elektro Verteilung USV Service & Support USV Software USV Anlagen für Rechenzentren ATS Automatic Transfer Switches Konverter CATx Patchkabel LWL Patchkabel Netzwerkschränke Serverschränke Remote I/O Kontakte über IP Remote Power Management Rack Monitoring / Serverraum Überwachung Wireless Communication Mobiles Ethernet / Netzwerk GSM / GPRS / EDGE / UMTS / HSDPA Device Server Secure Console Server Serielle Server USB over IP	Brandfrühsterkennung Brandmelder Brandschutzpaneele Brandschutztüren Brandmeldezentralen Doppelboden / Doppelböden E-Installationstechnik Gaslöschanlagen Hochverfügbarkeitsraum / Hochverfügbarkeitsräume Kabeldurchführungen Klimageräte Leckagenwarnsysteme Netzersatzanlagen Präzisionsklimaschränke Sauerstoffreduzierung Serversafes Sicherheitsfolien Switchbox Videoüberwachung Zutrittssysteme